



RC Series

RC series has two different sizes which are 500mm x 500mm and 500mm x 1000mm, it is mainly for rental market, as well as fixing installations since this cabinet design is quite easy to be mounted on the wall.

The smallest member of pixel pitch 1.9mm can create a HD stage for your rental event, stability and high contrast.

1.9mm	2.6mm
2.97mm	3.91mm



LED display Indoor rental solution

RC Series







Key Features


- Ultra HD LED display.
- Two cabinet sizes option.
- Front and rear maintenance.
- Creative for curve display.
- Both for rental and fix.
- High contrast ratio and grayscale.
- High refresh rate.



Dimensions

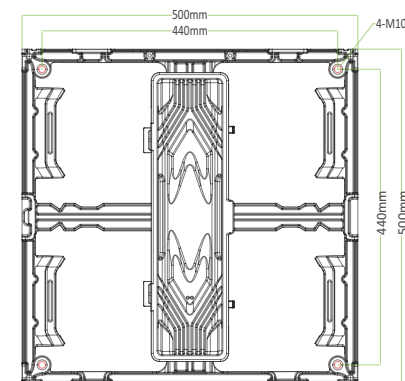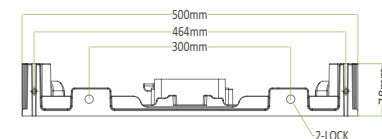

Cabinet with modules.

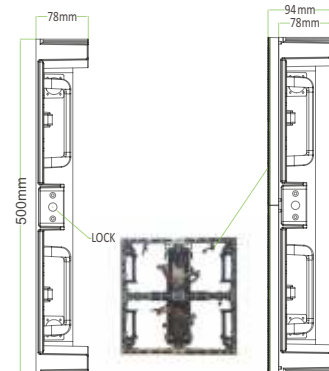

Front access with magnet.

Specifications

Model	RC1.9	RC2.6	RC2.97	RC3.91
Pixel Pitch-mm	1.9	2.6	2.97	3.91
Pixel Density-pixels/m ²	277,008	147,929	113,367	65,410
LED type	SMD1515	SMD1515	SMD1515	SMD2020
Module Dimension	250 x 250mm	250 x 250mm	250 x 250mm	250 x 250mm
Module Resolution	128 x 128	96 x 96	84 x 84	64 x 64
Panel Dimension	500 x 500 x 78mm 500 x 1000 x 78mm	500 x 500 x 78mm 500 x 1000 x 78mm	500 x 500 x 78mm 500 x 1000 x 78mm	500 x 500 x 78mm 500 x 1000 x 78mm
Panel Resolution	256 x 256 256 x 512	192 x 192 192 x 384	168 x 168 168 x 336	128 x 128 128 x 256
Panel Weight	8.5 kg 13 kg	8.5 kg 13 kg	8.5 kg 13 kg	8.5 kg 13 kg
Typical Brightness(nits)	800	1000	1000	1000
Viewing Angle	H160°/V160°	H160°/V140°	H160°/V140°	H160°/V140°
Refresh Rate	≥3840Hz	≥3840Hz	≥3840Hz	≥3840Hz
Operating Power Source	100 - 240 V, 50 - 60 Hz	100 - 240 V, 50 - 60 Hz	100 - 240 V, 50 - 60 Hz	100 - 240 V, 50 - 60 Hz
Max. Power Consumption (W/m ²)	712	730	728	722
Avg. Power Consumption (W/m ²)	228	234	233	231
Serviceability	Front&Rear Mounting on wall	Front&Rear Mounting on wall	Front&Rear Mounting on wall	Front&Rear Mounting on wall
IP Rating	IP43(Indoor)	IP43(Indoor)	IP43(Indoor)	IP43(Indoor)
Operating Temp/Humidity	-20°~ 55°C, 10~90% RH	-20°~ 55°C, 10~90% RH	-20°~ 55°C, 10~90% RH	-20°~ 55°C, 10~90% RH
Storage Temp/Humidity	-40°~ 60°C, 10~90% RH	-40°~ 60°C, 10~90% RH	-40°~ 60°C, 10~90% RH	-40°~ 60°C, 10~90% RH
Life Span	100,000 h	100,000 h	100,000 h	100,000 h
Curving (Optional curved locks)	YES	YES	YES	YES

Note: The specifications are for reference, actual values may vary.

PUBLIDUPLO - TECHNOLOGY & SERVICES, LTD

Portugal Factory Add:

Zona Industrial de SAM, edf.1 - Rua da Fervença - 4760-725 Ribeirão PORTUGAL

E-mail: jorgesa@publiduplo.com