




LED Display

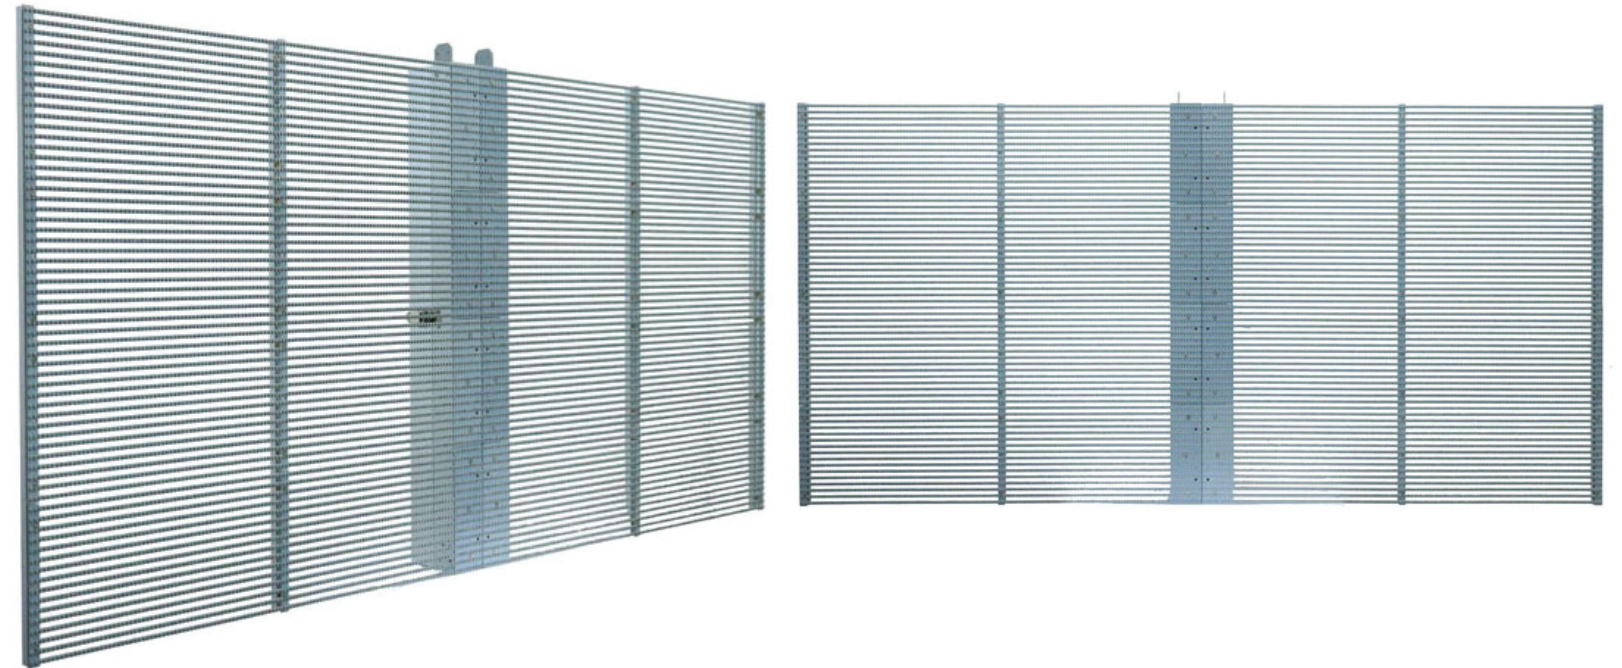

TF Series

High transparency and fixed application

This design for fixed application, it's ultra-thin, super light-weight, only 11kg/sqm, no need steel frame construction. All these save transport cost, as well as the installation time and labor cost. Pixel pitch is 3.91mm in width and 7.81mm in height, gives the screen a quite high transparency.



Features

- Panel, thickness 68mm.
- Light-weight, only 11kgs per sqm.
- High contrast ratio.
- Different brightness for outdoor environment.

With high transparency 85%, ensure the lighting requirements and angle between floors, glass windows, facade lighting structure.

Specifications

Model	TLF3.9-7.8	TLF3.9-7.8
Pixel Pitch(mm)	3.91-7.81mm	3.91-7.81mm
Pixel Density(pixels/m²)	32,768	32,768
LED type	SMD1921	SMD1921
Module Dimension	500 x 62.5mm	500 x 62.5mm
Module Resolution	128 x 8	128 x 8
Cabinet Dimension	500 x 1000 x 68mm	500 x 1000 x 68mm
Cabinet Resolution	256 x 64	256 x 64
Cabinet Weight	5.5 kg	5.5 kg
Viewing Angle	H160°/V140°	H160°/V140°
Brightness	5000	2500
Refresh Rate	≥3840Hz	≥3840Hz
Operating Power Source	100 - 240 V, 50 - 60 Hz	100 - 240 V, 50 - 60 Hz
Max. Power Consumption (W/m²)	750	720
Avg. Power Consumption (W/m²)	240	230
Serviceability	Front&Rear	Front&Rear
IP Rating	IP43(Indoor)	IP43(Indoor)
Operating Temp/Humidity	-20°~ 55°C, 10~90% RH	-20°~ 55°C, 10~90% RH
Storage Temp/Humidity	-40°~ 60°C, 10~90% RH	-40°~ 60°C, 10~90% RH
Life Span	100,000 h	100,000 h

Note: The specifications are for reference, actual values may vary.